
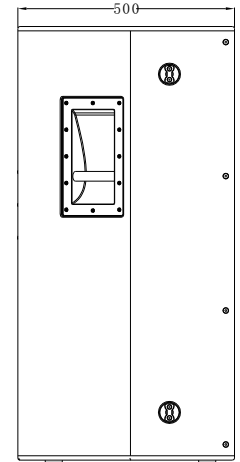
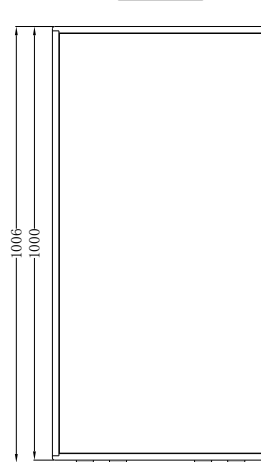


K-3




specification

model	K-3
rated impedance	8 Ω
operation mode switchable	bi-amp
power handling capacity midrange AES/peak*	800W / 3200W*
power handling capacity HF AES/peak*	100W / 300W*
available frequency response**	130Hz-20kHz
max. sound pressure level***	145dB
directivity (h x v)	60°/40°
midrange-transducer rated size	2x12"
midrange-transducer voice coil diameter	3" / 76mm
LF-transducer magnet structure	neodymium
HF-compression driver rated size (VC)	4" / 100mm/4"
HF-compression throat diameter	2"
HF-compression magnet structure	neodymium
dimension h/w/d in mm	1000/500/500
weight	51kg

* peak 10ms, with TD-8000 amplifier and K-3 max controller setup

** -10dB with K-3 FR controller setup

***1m free field, pink noise, crest factor 10dB, with TD-8000 and K-3 SPL bi-amp controller setup

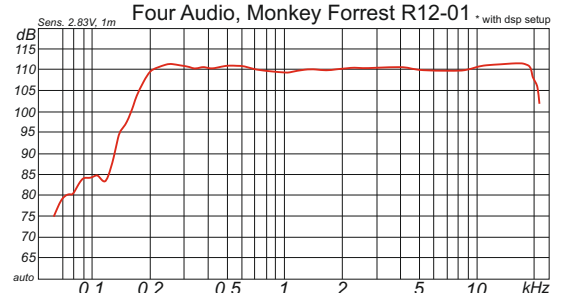

Features K-3

- 2x12" speaker neodymium (76mm voice coil)
- 2x12" speaker hornloaded
- 1x4" (100mm) compression driver neodymium
- high frequency horn 2" throat
- horn directivity h60°/v40°
- housing cluster angle 30°
- 7 air-lock mounting points
- 2 Neutrik speakon 4-pin
- bi-amp
- cabinet link function
- perforated steel front grill powder coated
- acoustic foam 4mm behind front grill
- wood housing plywood 15mm, 27mm
- polyurea (PU) high scratch proof coating



Appliance K-3

- high-mid unit for mobile and touring PA
- high-mid unit for fix installation

Application GS-15

- live events, live entertainment
- mobile disco
- discotheque

small variety of wide range for bass cabinets extension

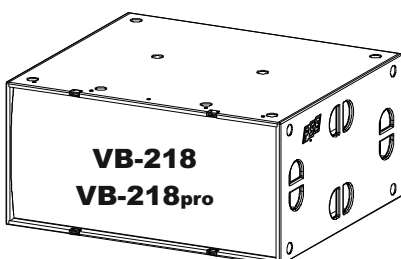

recommended low-mid extension

